


Ra = Radius all wheels steered
 Radius allradgelenkt
 Rayon toutes les roues directrices
 Radio de giro con todas las ruedas giradas
 Raggio di curva con tutte le ruote sterzate

Die Arbeitsbereiche am Teleskopausleger mit Klappspitze



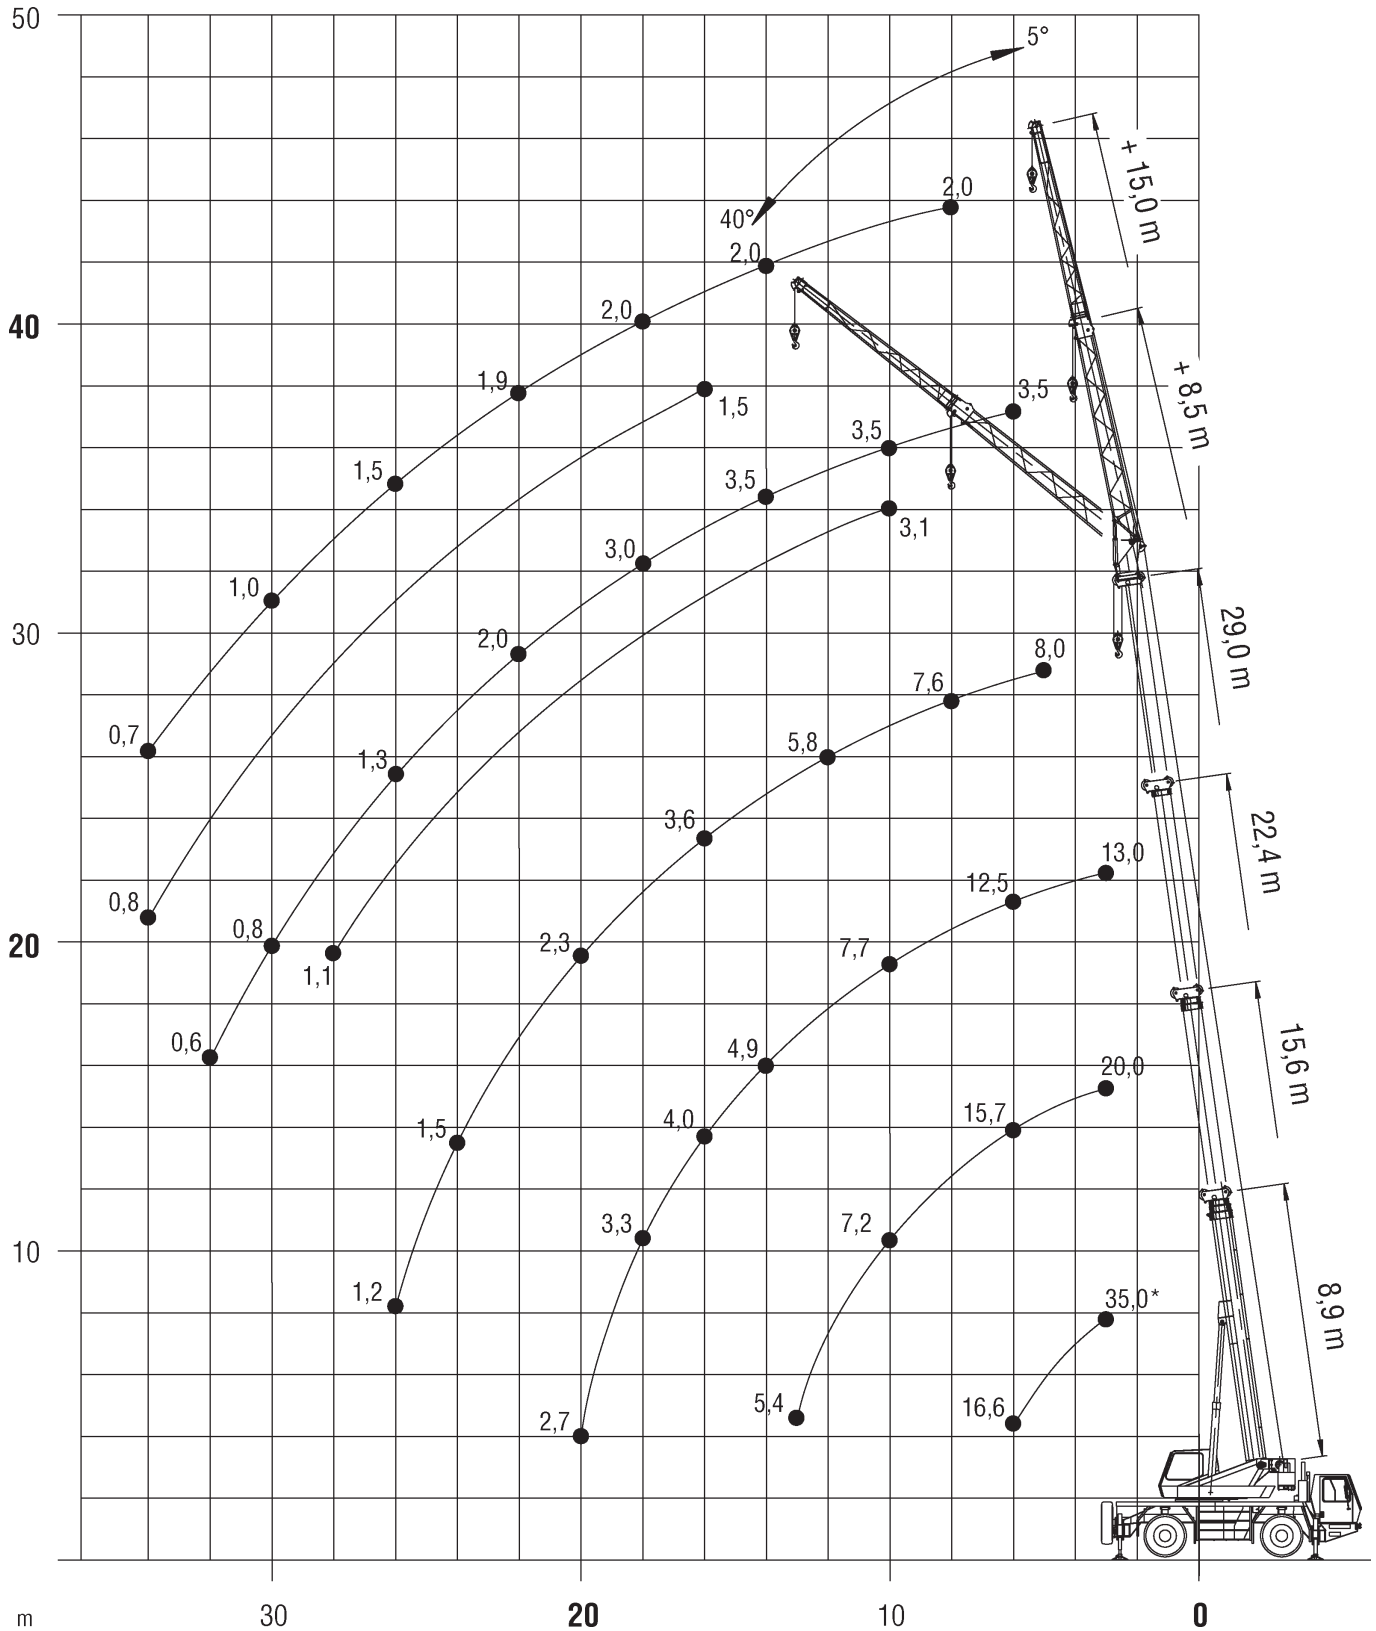

8,9-29m



6t



6,325x6,2m



360°



75%

m	8,9	12,3	15,6	19	22,4	25,7	29	m
3	35*	25	20	15	13			3
4	25,5	23,5	20	15	13	10,5		4
5	20,5	20	17,8	15	13	10,5	8	5
6	16,6	16,4	15,7	14,3	12,5	10,5	8	6
7		14,2	13,2	12,7	11,5	9,9	7,8	7
8		11,6	10,7	10,7	10,4	9,2	7,6	8
9		9,6	8,7	9	8,9	8,5	7,4	9
10		8	7,2	8,1	7,7	7,6	7,1	10
11			6,4	7,2	6,6	6,7	6,6	11
12			6	6,3	5,7	5,8	5,8	12
13			5,4	5,5	5,3	5,1	5,2	13
14				4,9	4,9	4,4	4,6	14
15				4,3	4,4	3,9	4	15
16				3,9	4	3,5	3,6	16
18					3,3	2,7	2,9	18
20					2,7	2,4	2,3	20
22						2	1,9	22
24							1,5	24
26							1,2	26

*nach hinten

Raupenkrane

Mobile Faltkrane

Teleskopkrane

Transportfahrzeuge

Bühnen & Stapler

Engineering

Allgemeines



29m



8,5/15m



6t



6,325x6,2m



360°



75%

m	8,5		15		m
	5°-20°	20°-40°	5°-20°	20°-40°	
9	2,5				9
10	2,4	2			10
11	2,3	2			11
12	2,2	1,9	1,3		12
13	2,2	1,9	1,2		13
14	2,1	1,8	1,2		14
15	2	1,8	1,1		15
16	2	1,8	1,1	0,9	16
18	1,8	1,7	1	0,9	18
20	1,8	1,7	0,9	0,8	20
22	1,7	1,6	0,9	0,8	22
24	1,6	1,6	0,8	0,8	24
26	1,3	1,4	0,8	0,7	26
28	1	1,1	0,7	0,7	28
30	0,8		0,7	0,7	30
32			0,7	0,7	32
34			0,6	0,6	34